

FEATURES

- Revolutionary positive securing system prevents unintentional power disconnection
- Patented C14 locking mechanism is compatible with SSEMCO® P-Lock® outlets and supports interoperability with any standard C13 outlet
- Fit for high density multi-outlets design
- Multi-angle plug option
- Up to 15 Amps Current Rating
- Various colors / length available



TECHNICAL SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Standard	IEC 60320
High potential test voltage	2000VAC (1min 50Hz)
Current and voltage rating	North America : 10A/13A/15A 250VAC Europe/China : 10A 250VAC
Operation temperature	-20°C ~ +70°C
Flammability corresponding to	Plug/Connector: UL 94V-2 or better
Conductor Size Option	For North America : 18AWG / 16AWG / 14AWG For Europe/China : 0.75mm ² / 1.0 mm ²

COMMON APPLICATIONS

- Data centers
- Medical devices
- Automation industry
- Industrial equipment
- Architectural devices
- Broadcasting stations
- Critical power management




ORDERING INFORMATION

61413X - XX XYZ X

Plug Angle Option

Angle options are only available for UL type

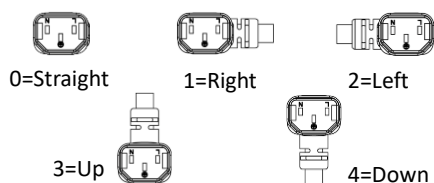

WIRE TYPE:

For North America:


94=18AWG/SVT, 95=18AWG/SJT
85=16AWG/SJT, 75=14AWG/SJT

For Europe:

13=0.75mm²/H05VV-F, 23=1.0mm²/H05VV-F

For China: 1C=0.75mm²/RVV, 2C=1.0mm²/RVV

Color Options: (Actual color may vary)

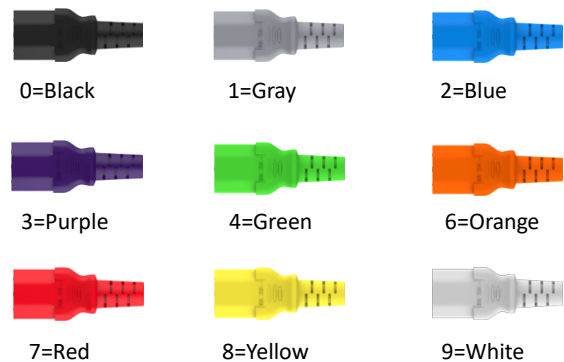

CABLE LENGTH:

For North America: XY=feet, Z=inch

For other region: X=meter, YZ=cm