



## FEATURES

- Revolutionary positive securing system prevents unintentional power disconnection
- Patented C20 positive mechanism locks with SSEMCO® P-Lock® outlets and is backward compatible with any standard C19 outlet
- Fit for high density multi-outlets design
- Multi-angle plug option
- Rated up to 20 Amps
- Various colors / length available



## TECHNICAL SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Standard	IEC 60320
High potential test voltage	2000VAC (1min 50Hz)
Rating	North America : 15A/20A 250VAC Europe/China : 16A 250VAC
Operation temperature	-20°C ~ +70°C
Flammability corresponding to	Plug/Connector: UL 94V-2 or better
Conductor Size Option	For North America : 14AWG / 12AWG For Europe : 1.5mm <sup>2</sup> / 2.5 mm <sup>2</sup>

## COMMON APPLICATIONS

- Data centers
- Medical devices
- Automation Industrial
- Industrial Equipment
- Architectural devices
- Broadcasting stations
- Critical Power Management

## APPROVALS




## ORDERING INFORMATION

**62019X - XX XYZ X**

### Plug Angle Option

Angle options are only available for UL type

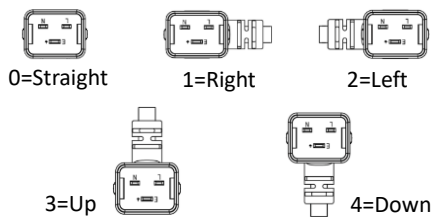

### WIRE TYPE:

For North America:

75=14AWG/SJT, 65=12AWG/SJT

For Europe:

33=1.5mm<sup>2</sup>/H05VV-F, 53=2.5mm<sup>2</sup>/H05VV-F

For China: 3C=1.5mm<sup>2</sup>/RVV, 5C=2.5mm<sup>2</sup>/RVV

### Color Options: (Actual color may vary)



### CABLE LENGTH:

For North America: XY=feet, Z=inch

For Europe: X=meter, YZ=cm